
HC-N 485通讯智慧型排烟排热窗控系统
485 COMMUNICATION INTELLIGENT SMOKE AND HEAT EXHAUST WINDOW CONTROL SYSTEM

智慧型排烟排热窗控系统的配置
CONFIGURATION OF INTELLIGENT SMOKE AND HEAT EXHAUST WINDOW CONTROL SYSTEM

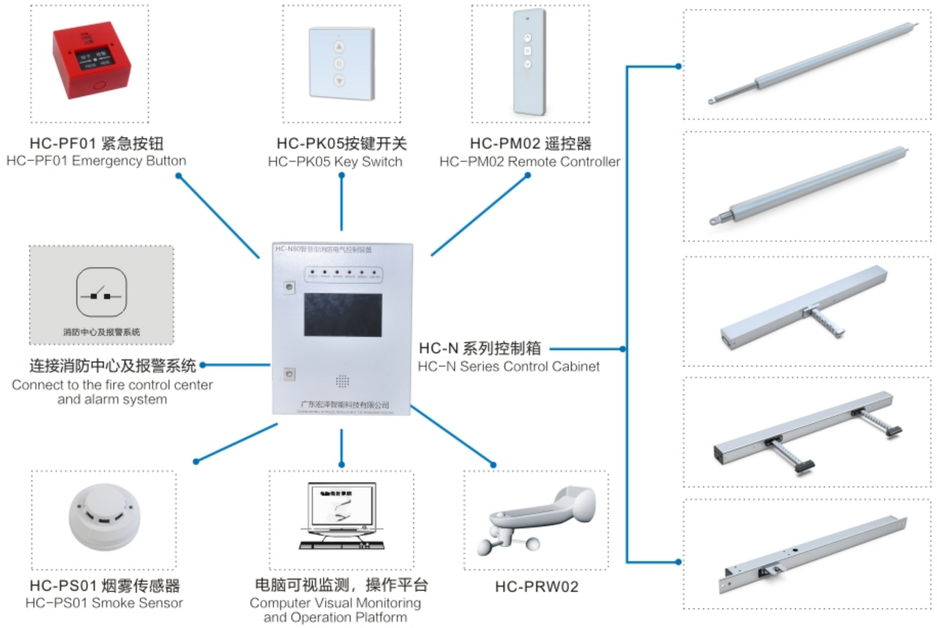


产品特性与优点 PRODUCT FEATURES AND ADVANTAGES

- 全彩智能电容触摸串口屏，丰富的UI界面
- 支持开窗器集中、分组、单独控制
- 支持多个开窗器任意编组管理
- 支持开关停触摸按键（触摸屏，可拆）

- Full-color Intelligent Capacitive Touch Serial Screen with Rich UI Interface.
- Supports centralized, grouped, and independent control of window openers.
- Supports arbitrary grouping management of multiple window openers.
- Supports touch buttons for opening, closing, and stopping functions (detachable touch screen).

HC-N 总控-分控-点控485通讯系统图
HC-N Master Control - Sub-Control - Point Control 485 Communication System Diagram

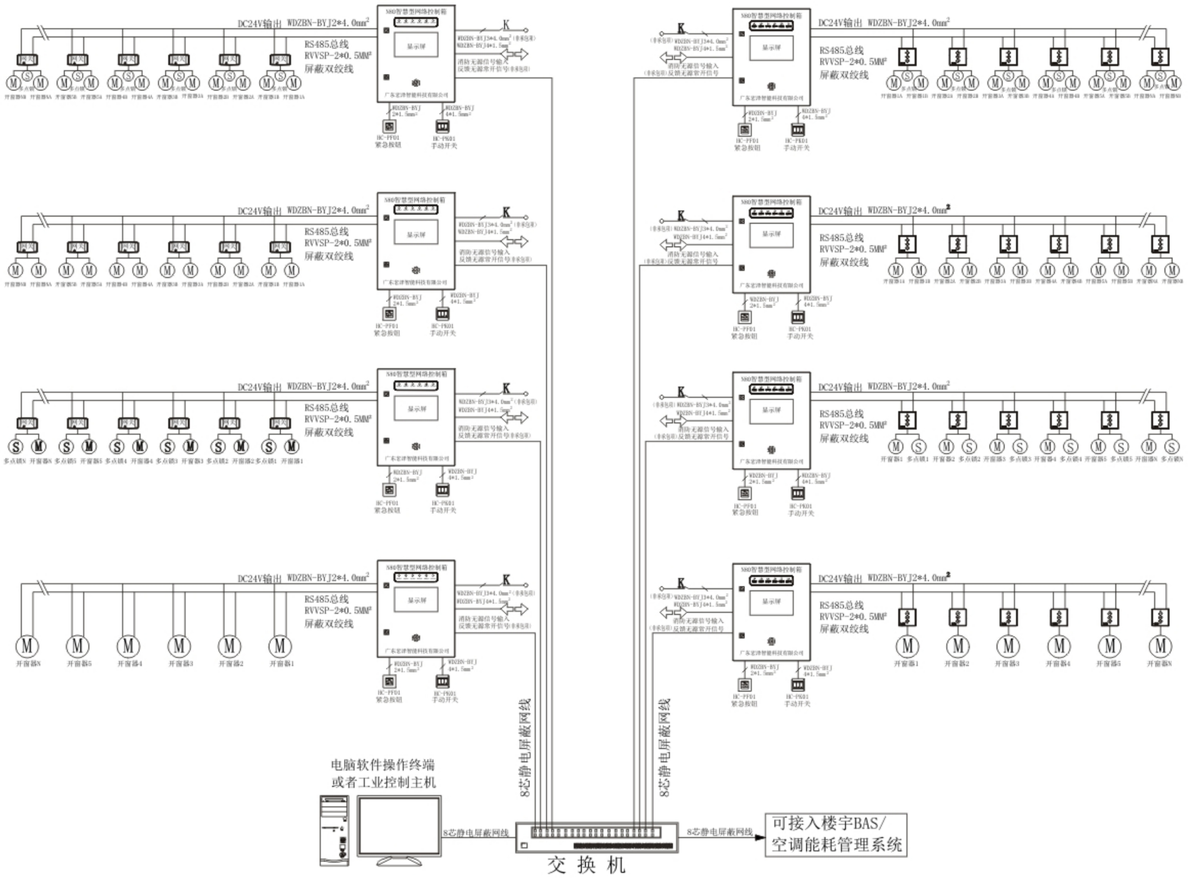

产品参数 PRODUCT PARAMETERS

产品型号 Product Model	外形尺寸 Product Size	输入电压 Input Voltage	输出电压 Output Voltage	输出额定电流 Rated Output Current	功率 Power	防护等级 Protection Class
HC-N80\16A-D24	400×500×150mm	AC100-230V	DC24V±10%	16A	384W	IP54
HC-N80\32A-D24	400×500×150mm	AC100-230V	DC24V±10%	32A	768W	IP54
HC-N80\64A-D24	400×500×150mm	AC100-230V	DC24V±10%	64A	1536W	IP54